

Specialty Lighting & Effects

“Light is the first of painters. There is no object so foul that intense light will not make it beautiful.”

- Ralph Waldo Emerson

Our extensive portfolio of Specialty Lighting offers lighting solutions for all event types and sizes from simple backyard installations to complex high-end events that occupy thousands of square feet. Further, our support staff is available to discuss your specific lighting needs because we are dedicated to making sure you choose the best Specialty Lighting solutions for your application!

Multiple Solutions:



Traditional Par Lights



LED Par & Wash Lights



Special Effects



Accessories



Professional Grade Pinspot

Pinspot Features:

- U.L. Listed
- Beautiful white lacquered can
- Choose from multiple Lense Colors (sold separately)
- A/C socket and cord w/plug included
- Pinspot Light Source: 30W Lamp (included)



Color Lens Options: Red (R), Pink (P), Magenta (M), Amber (A), Green (G), Purple (P), Blue (B), Aqua (AQ), Yellow (Y).

Description	Product Code
Pinspot, UL, White	PSPARULW
Color Lense (EA)	PSL_COLOR

Professional Grade PAR 38

PAR 38 Features:


- U.L. Listed
- Beautiful white lacquered can
- Gel holder included
- A/C socket and cord w/plug included
- PAR 38 Light Source: 90W Halogen Lamp (sold separately)

Description	Product Code
PAR 38, UL, White	PAR38ULW
90W Halogen Bulb	PAR3890WB
P 38 Gel Pack (4)	GEL38

PAR 38 Gel Pack includes one each: Yellow, Primary Green, Deep Blue, Primary Red - Gel Pack sold separately.



Specialty Lighting & Effects

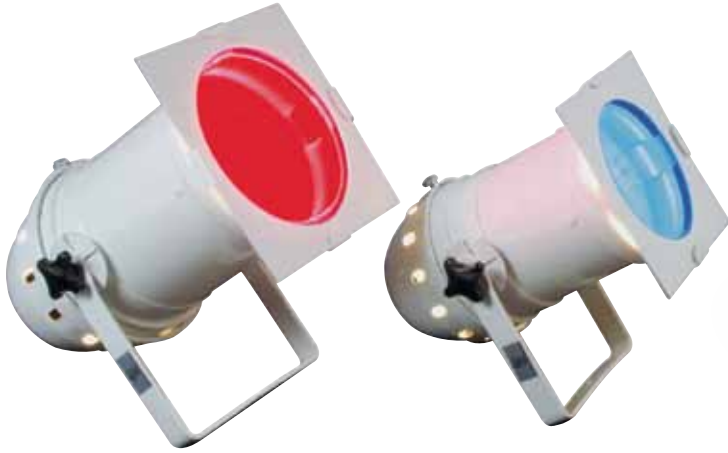

**Recent model gel frame holders are octagonal shaped*

Gel Pack Options:

A: Yellow, Primary Green, Deep Blue, Primary Red
 B: Bright Pink, Mauve, Orange, Peacock Blue

Gel Pack Sold Separately, please indicate color choice with order.

Professional Grade PAR 56 & 64

PAR 56 & 64 Features:

- U.L. Listed
- Beautiful white lacquered cans
- Gel holder included
- A/C socket and cord w/plug included
- PAR 56 Light Source: 300W Flood Lamp (sold separately)
- PAR 64 Light Source: 500W Flood Lamp (sold separately)

Description	Product Code
PAR 56, UL, White	PAR56ULW
300W Lamp	P56300WBMB
P 56 Gel Pack (4)	56GEL(A/B)
PAR 64, UL, White	PAR64ULW
500 W Lamp	P64500WBMB
P 64 Gel Pack (4)	64GEL(A/B)

PAR 56 Lighting Kit

Complete, economical lighting package featuring one each: High quality polished aluminum PAR can w/power cord, hanging bracket & lamp socket, 300 watt medium flood sealed beam PAR lamp, 4-Color gel assortment, Octagon gel frame, pipe clamp, 2 ft. safety cable.

Description	Product Code
PAR 56 Kit	PAR56KPA



FlexiPAR

FlexiPAR is a high-tech alternative to standard PAR cans. Made of thick aluminum and includes 4 lenses to change the degree of flood: VNSP, NSP, MFL, WFL. Uses a super bright 575 watt, 3,200 Kelvin, lamp (sold separately). Includes hanging bracket, cord set and gel frame. High output and quick lens/ beam change make the FlexiPAR a popular choice for a high output spotlight within the tent environment. Optional Barn Doors sold separately.

Description	Product Code
FlexiPAR, White	FLEXIPARW
575W Lamp	FLEXIP575WB
Barn Doors, White	FLEXIPBDW

Specialty Lighting & Effects

LED Facts & Benefits...

- LEDs produce much more light output per watt than incandescent and halogen par lamps and therefore consume up to 90% less power for a similar amount of light output.
- Our LEDs are rated for up to an incredible 50,000 hour life span compared to the typical 2,000 hour life span of a traditional bulb.
- Because LEDs disperse heat more efficiently, they operate much cooler than traditional light bulbs.
- LEDs do not require a dichroic filter to create specific hues rather, they utilize an adjustment of power levels in red, green and blue (RGB) intensity that can yield thousands of potential color outputs.



Common LED Terminology:

We understand that sorting through all of the features and specifications of LED lighting can be overwhelming so we have included an explanation of terminologies commonly used in describing LED fixtures:

LED = Light-Emitting Diode. Instead of traditional incandescent light bulbs, LED lighting fixtures contain a semiconductor with small diodes. Light is created as power current flows through the semiconductor and individual diodes.

LUX - the amount of visible light per square meter illuminated on a surface as perceived by the human eye.

RGB(W) - Simply stands for Red, Green, Blue and White (where applicable). Our LED fixtures generate many different color options by combining Red, Green and Blue. Our COLORdash Accent also contains pure white LEDs thus we describe this fixture as RGBW. Colors can be controlled on the back of our fixtures via dip switches or by way of a DMX controller.

Dip Switch - Our LED fixtures (excluding pin spot) include a series of 10-12 switches on the back of the fixture that allow for manual control of color output and automated programs.

DMX - The standard protocol for sending electronic instructions from a controller to an intelligent LED containing light fixture.

Beam & Field Angles - Simply serve as a gauge of the width of the light beam emitted by the LED fixture. We recommend narrow to medium beam angles for fixtures that will be shinning onto specific targeted objects such as a table top or dance floor and wide beam fixtures are recommended for washing large non-specific areas with static colors. Taking the light beam angle of an LED fixture into consideration is key to choosing the right solution for your application!

LED Pinspot

The LED Pinspot includes two front focal lens options to produce hard-edge beams for a variety of applications. The LED Pinspot is extremely lightweight, at less than one pound, and is powered by a 3W white LED. The autoswitching power supply allows the fixture to adapt to the voltage provided, ranging from 100V to 240V.

Specifications:

- Beam angle: 6° (installed) 9°(included)
- Lux (6°): 15,000 @ 1m
- Lux (9°): 5,550 @ 1m
- Light source: 1 (white) LED 50,000hrs
- Power and current: 120V, 60Hz: 4W, 0.1A operating, 0.1A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 0.9 lbs.
- Size: 7.6" x 4.2" x 5.9"



Specialty Lighting & Effects

LEDrain 38



LEDrain 38 & 64

Medium Beam

The LEDrain series offer medium beam output which is ideal for highlighting specific areas such as stages and dance floors with static red, green and blue (RGB) or combinations thereof. LEDrain fixtures can be controlled by a series of DIP switches on the back of the units or can be plugged into a traditional DMX control board for more advanced control of the light fixtures.



LEDrain 64

Unit	LEDrain 38	LEDrain 64
Primary Function	Medium Beam LED Par Light	Medium Beam LED Par Light
LUX	1,033	2,020
Built-In Programs	YES	YES
Sound Activation	YES	YES
Linkable Power	YES	YES
Color Mixing	RGB	RGB
LED Specs	75 (25 red, 25 green, 25 blue)	183 (61 red, 61 green, 61 blue)
Field Angle	23°	32°
Dimensions	6.2" x 7.4" x 11.2"	8.4" x 8.9" x 12.2"
Weight	2.8 lbs.	4.4 lbs.
Product Code	LED-RAIN38	LED-RAIN64

LEDsplash 86 & 152

Wide Beam (Wash Lights)

The LEDsplash series offer wide beam output which is ideal for washing large event areas with solid colors through a mixture of red, green and blue (RGB). LEDsplash fixtures can be controlled by a series of DIP switches on the back of the units or can be plugged into a traditional DMX control board for more advanced control of the light fixtures.



LEDsplash

Unit	LEDsplash 86	LEDsplash 152
Primary Function	Wide Beam LED Par Light	Wide Beam LED Par Light
LUX	530	740
Built-In Programs	YES	YES
Sound Activation	NO	YES
Linkable Power	YES	NO
Color Mixing	RGB	RGB
LED Specs	86 (44 red, 21 green, 21 blue)	151 (51 red, 50 green, 50 blue)
Field Angle	36°	60°
Dimensions	4.9" x 6" x 6.2"	5.5" x 7.5" x 8.2"
Weight	1.8 lbs.	3.1 lbs.
Product Code	LED-PAR83	LED-PAR152



LEDsplash 152

Specialty Lighting & Effects



COLORdash Accent

Wide Beam (Wash Lights)

The COLORdash™ Accent takes lighting in confined spaces to a new level, thanks to 7 high power, 1-watt LEDs and its diminutive size. At just under 7" long and 3" in diameter, this 1.5lb light mounts just about anywhere. Robust, yet sleek in appearance, its cast aluminum housing helps dissipate heat. Control is via DMX or on-board dials capable of static colors or built-in programs.

Specifications:

- 18° optics installed
- Beam angle: 20°
- Field angle: 37.5°
- Lux: 926 @ 1m, 240 @ 2m
- Power and current: 120 V, 10 W
- Weight: 1.5 lbs.
- Size: 6.9" x 4.3" x 2.5"

Features:

- 3, 4, or 9-channel ultra compact RGBW LED wash light
- Operating modes
 - 3-channel: RGB control
 - 4-channel: RGBW control
 - 9-channel: RGBW, dimmer, macro, strobe, auto program trigger, auto program speed adjustment
- RGBW color mixing with or without DMX control
- Built-in automated programs via master/slave or DMX
- Double-bracket yoke doubles as floor stand



Description	Product Code
COLORdash Accent	COLORDA



COLORdash Batten

Wide Beam Wash Light (Medium Beam Optics Available)

The COLORdash™ Batten is a compact linear LED wash tailor made for washing applications where space is limited. Fitted with 24 high-power LEDs, the COLORdash™ Batten makes for a perfect wall wash or accent light. Brackets are included to attach units in a linear array or stacked for different effects.

Features & Specifications:

- 3, 4, 10, or 12-channel RGB LED linear wash light
- RGB color mixing with or without DMX controller
- Built-in automated programs via master/slave, DMX or COLOR-CON
- Includes 6.6 ft (2 m) power extension cable
- LCD display with password protection
- Double-bracket yoke doubles as floor stand
- Installed Optics: 30°
- Beam angle: 29.5°, Field angle: 55.4
- Lux: 357 @ 2 m
- Optional 15° optics available for narrower 14° beam angle, 1,729 Lux@ 2 m
- Light source: 24 x 1 W LEDs, 50,000hrs
- Weight: 7.9 lbs.
- Size: 3.1" x 17.5" x 7.4"



Optional Controller

Description	Product Code
Colordash Batten	COLORDB
Batten Controller	COLOR-CON

Specialty Lighting & Effects



Gobo Zoom LED

Gobo Zoom projects your message or custom image anywhere you want it. This powerful LED powered gobo projector comes with 8 easily replaceable, rotating gobos. And thanks to heat-free LED power, you can make your own custom gobos at home from transparency material! The variable 22° - 38° beam angle allows for crisp focusing at a variety of sizes.

Features & Specifications:

- Super-compact custom gobo projector for use in any event
- Manual zoom for short-throw or long-throw applications
- Print your own gobos on transparency film for custom gobos at every event
- Includes 8 popular gobos and 4 colored gels to compliment a variety of events
- User-configurable stand-alone operation provides excellent control without DMX

Description	Product Code
Gobo Zoom LED	GOBOLED



Hurricane 700 Fog Machine

Features:

- Output: 1,500cfm
- 0.6L tank capacity
- Fog fluid included (0.5L)
- 4 minute heat up
- Manual fog button
- Wired remote included
- Water-based fogger
- Weight: 4 lbs.
- Size: 8.5" x 7.1" x 4.9"



Free Fluid Included!

Description	Product Code
Hurricane 700 Fog Machine	F-700
1 Gallon Fog Fluid	FJ-U

Bubble Machine

Features:

- Plastic construction prevents rust
- Manual bubble button
- Easily removable fluid tank
- Power: 110V or 230V
- Weight: 6.8 lbs.
- Size: 12.5" X 7" X 6.5"

Description	Product Code
Bubble Machine	B-250
1 Gallon Bubble Fluid	BJ-U



**Fluid sold separately*

Specialty Lighting & Effects



\$120.00
OBEY40

Features:

- Universal DMX-512 controller
- Controls up to 12 DMX Lights
- 30 banks of 8 scenes, 240 scenes max
- 192 DMX channels of control
- 6 sets of chases containing 240 scenes
- Program fade and speed time into each step
- Fog & strobe control buttons
- Grab any fixture on the fly
- Beat activation, tap-sync and auto run
- 3-space (3U) rack mount

Specifications:

- Power: DC 12V 0.5A 115V/60Hz, 230V/50Hz
- Weight: 6 lbs.
- Size: 20.25" x 3.5" x 6.75"

Obey 40 DMX Controller

The Obey™ 40 DMX Controller brings maximum versatility to your Specialty Lighting inventory. Control of up to 12 fixtures at 16 channels each. The Obey™ 40 features 30 banks on 8 scenes, or up to 240 scenes and also offers fog/strobe control and MIDI compatibility. With the Obey™ 40 the possibilities are endless!



3 Pin DMX Cables

Description	Product Code
5' - 3 Pin DMX Cable	DMX-1.5
15' - 3 Pin DMX Cable	DMX-4.5
25' - 3 Pin DMX Cable	DMX-25
50' - 3 Pin DMX Cable	DMX-50

DMX Terminator

Our DMX Terminator is recommended for applications that require daisy chaining the DMX signal of multiple light fixtures together. Simply insert the Terminator into the DMX out port of the last fixture in the daisy chain to reduce DMX signal reflections and ensure optimum signal performance.



Description	Product Code
DMX Terminator	DMXTM3P

Wireless DMX Transmitter

Lightweight and self-contained, the D-Fi™ PLUS transmits and receives up to 512 DMX channels from up to 393 feet and control up to nine universes or 4,608 DMX channels with multiple units and 27 user-selectable UHF frequencies.

Features & Specifications:

- Unobstructed distance: 393 ft. (120m)
- FCC compliant
- Power: DC 9V 500mA 115V/60Hz or 230V/50Hz
- Weight: 0.8 lbs.



Description	Product Code
D-FI Plus (EA.)	DFIPLUS

**Two Transmitters required per lighting universe*